

Plant Growth Chambers

MLR-352H

Incubation



MLR-352H

Temperature range (MLR-352H)

5°C to +50°C (Light OFF)

+10°C to +50°C (Light ON)

Lighting range

0 lx to 20,000 lx

(Adjustable)

Humidity range (MLR-352H only)

60% RH to 90% RH (Light OFF)

55% RH to 85% RH (Light ON)

Versatile Plant Growth Chambers

- Suits a wide range of applications
 - Culture of plant cells, tissues and organs
 - Acclimation and rearing of plants
 - Incubation and rearing of insects
- Graphic LCD provides easier operation
- Programmable temperature, lighting and humidity functions (MLR-352H)
- Microprocessor PID control and Refrigeration Capacity Control
- Data logging function

MLR-352H

The wide variety of temperatures and lighting patterns that are essential in plant research can now be accurately reproduced and controlled. And you get humidity control* too!


(*MLR-352H only)

Features

- Microprocessor PID and Refrigeration Capacity Control eliminate temperature fluctuations and thereby improve temperature control. This allows superior precision experiments plus energy and electricity savings.
- Programmable temperature function is perfect for temperature cycle and vernalization treatment research.
- 12-step programs x 10 patterns can be memorized.
- Selectable clock mode or timer mode
- Multiple programs can be linked (Join mode).
- Starting day and time of operation can be programmed.
- Operation data of approximately last 2 weeks (6-minute intervals) can be automatically recorded.
- Data can be retrieved on the control panel.
- Data can be transmitted to a PC (CSV data via Ethernet (LAN) Interface MTR-L03 or RS232C/RS485 Interface MTR-480).
- Easy calibration: temperature and humidity can be calibrated easily from the control panel.
- Small and lightweight, high-molecular membrane-type humidity sensor also boasts a high degree of accuracy and reproducibility. Of the newest high-molecular membrane type, the humidity sensor accurately measures chamber humidity (MLR-352H only).

Control Panel


Graphic LCD panel with pop-up menu function on control panel provides more visual display and allows intuitive operation.

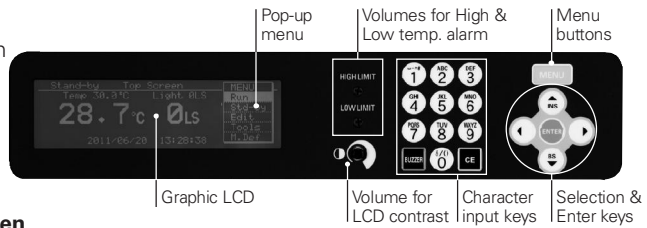

Program Setting Screen

1. Selection of menu

Temperature light and humidity pages scroll with down key

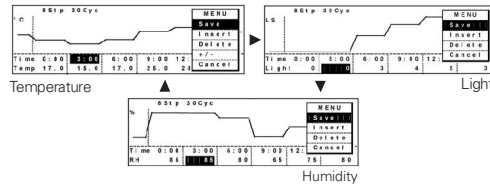


2. Various ways of starting programs

Selection from Clock mode and Timer mode. Setting of Join mode and Start time available.




3. Data logging function

Operation data can be recorded



Dimensions (MLR-352H)

Unit: mm (inch)

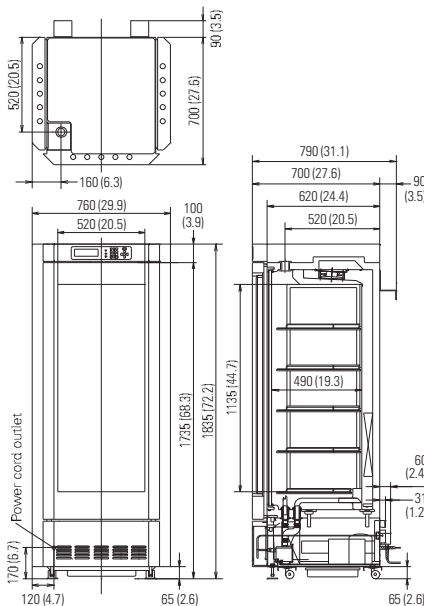

Specifications

MLR-352H	
External dimensions (W x D x H)	760 x 700 x 1835 (mm) / 29.9 x 27.6 x 72.2 (inch)
Internal dimensions (W x D x H)	520 x 490 x 1135 (mm) / 20.5 x 19.3 x 44.7 (inch)
Effective capacity	294 litres (10.4 cu.ft.)
Shelves	PE coated steel wire, 4 pcs. Inner dimensions: W465 x D450 (mm) / 18.3 x 17.7 (inch), Maximum load: 25kg/shelf PE coated steel wire with stainless steel cover, 1 pc. (bottom) Inner dimensions: W355 x D395 (mm) / 14.0 x 15.6 (inch), Maximum load: 25kg/shelf
Access port	40mm diameter x 1 (chamber top position)
Casters	4
Air circulation	Forced air circulation
Compressor	Hermetic type, 250 W
Heater	381 W
Defrost	Automatic defrost (2 patterns in MLR-352, 3 patterns in MLR-352H), Manual defrost
Option	Data acquisition system: MTR-5000-PW / MTR-L03-PW or MTR-480-PW
Net weight (approx.)	235kg (518 lbs.)
Control related specifications	
Temperature control range (AT 20°C, no load)	+5°C to +50°C (light off) +10°C to +50°C (light on)
Temperature distribution	±3.5°C (light on), ±1.5°C (light off) (AT 20°C, no load) ±2.5°C (light on), ±1.0°C (light off) (Set temperature 25°C, AT 20°C, no load)
Temperature fluctuation	±0.3°C (Set temperature 25°C, AT 20°C, no load)
Temperature control	Microcomputer PID and Refrigeration capacity control
Lighting range	0 lx to 20,000 lx Fluorescent lamp 40 W x 15, 6 increments (0, 1, 2, 3, 4, 5)
Humidity	Ultrasonic humidifier PID control
Humidity control range	60%RH to 90%RH (+15°C to +45°C and light off) 55%RH to 85%RH (+15°C to +45°C and light on)
Program function	Temperature, light and humidity 12-step repeat from 1 - 98 times or unlimited. Max. 10 programs memorized. Clock mode, Timer mode and Join mode available, Start date and time reservation function
Data logging function	Up to approx. 14 days with 6-minute intervals (record cannot be logged during a power failure), The daily information can be shown in graph display. (Older data will be overwritten automatically when memory becomes full.)
Real time clock	Battery back-up for clock function
Analog output for recording	0mV to 100mV / Temperature: 0°C to +50°C / Light: 0 to 5 / Humidity: 0%RH to 100%RH
Alarms and safety	Temperature alarm, High and low temperature limit, Humidity alarm
Voltage specification by destination	Model No.
Representative destination	Europe 230V, 50Hz (CE) MLR-352H-PE Korea 220V, 60Hz MLR-352H-PK Thailand 220V, 50Hz MLR-352H-PB

Caution: Panasonic guarantees the product under certain warranty conditions. Panasonic in no way shall be responsible for any loss of content or damage to content.
• Appearance and specifications are subject to change without notice.



Panasonic Healthcare Co., Ltd., Biomedical Business Unit is certified for:
Quality management system: ISO9001
Medical devices quality management system: ISO13485



Panasonic Healthcare Co., Ltd., Biomedical Business Unit is certified for:
Environmental management system: ISO14001

DISTRIBUTED BY:



PT. SIGMA BIMED
Indonesia Sole Distributor

Jl. Agung Utara Raya Blok A 36D/42 Sunter Agung Jakarta Utara 14350 Indonesia

Telp. (62-21) 64716568, 70240088, 70240099, 87960123, 87960456

Fax. (62-21) 64716566, 87961123, 87961456

Email : sigmabimed@indo.net.id, sales@sigmabimed.com

Website : www.sigmabimed.com
kemenkes RI AKL

Panasonic

Panasonic Healthcare Co., Ltd (Gunma Site-Biokiki Seizou Group)

1-1-1 Sakata Oizumi-Machi, Ora-Gun, Gunma 370-0596, Japan
Copyright Panasonic Healthcare Co., Ltd.

Melalui Scimed (Asia) Pte., Ltd. Singapore